

Features


- Quickly and easily attaches to concrete, steel or composite metal decking
- Integrated pin installs easily using powder-actuated or single-shot gas-actuated tools
- Works with most standard CADDY spring steel fasteners designed for rod attachments
- Rod is rigid and does not require secondary attachment to ceiling grid per NEC 300.11
- Stocked inventory - available when you need it
- Includes pre-assembled end-cap
- Specialized packaging simplifies material handling and minimizes sorting
- Rods are ready to install out of the box



Material: Steel
Finish: Electrogalvanized



Part Number	Length L	Diameter Ø	A	Static Load F
Smooth Rod				
DR4SF12	12"	0.215"	3/4"	95 lb
DR4SF24	24"	0.215"	3/4"	95 lb
DR4SF36	36"	0.215"	3/4"	95 lb
DR4SF40	40"	0.215"	3/4"	95 lb
DR4SF48	48"	0.215"	3/4"	95 lb
Threaded Rod				
DR4TSF12	12"	1/4"	3/4"	95 lb
DR4TSF24	24"	1/4"	3/4"	95 lb
DR4TSF36	36"	1/4"	3/4"	95 lb
DR4TSF40	40"	1/4"	3/4"	95 lb
DR4TSF48	48"	1/4"	3/4"	95 lb

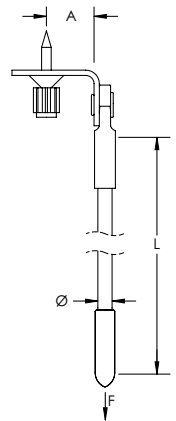

Uses Powers Fasteners, Inc. part number 50378.

Static load was established based on a 1-1/8" [28.6 mm] embedment depth and 3,000 psi [20.68 Mpa] normal-weight concrete. For variations in embedment and material please consult www.powers.com.

Pre-assembled drive pin from Powers Fasteners, Inc. recommended for use with Powers Sniper Powder Actuated Tool.

For shot-fired supports in seismic design category D, E, or F, maximum load is the lesser of 90 lb (400 N) or the published load.

Exempt from seismic design when supporting conduits less than 2-1/2" [64 mm] trade size, regardless of Ip.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at www.erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

HILTI is a registered trademark of Hilti Aktiengesellschaft. Ramset is a registered trademark of Illinois Tool Works, Inc. Simpson is a registered trademark of Simpson Strong-Tie Company Inc. SPIT is a registered trademark of Societe De Prospection & D'Inventions Techniques Spit. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

© 2016 Pentair All Rights Reserved
Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

