

FAS POWER WALL BRACKET

W | [Cablofil](#)

FEATURES & BENEFITS


Rough-in is fast and easy with FAS Power. Manufactured floor brackets slide under the sill plate with no vertical measuring needed. Wall brackets with pre-mounted boxes and rings quickly attach to the stud with switches and switch/outlet combinations in place. And for fast job starts, FAS Power products are prepackaged and shipped to the requirements of the contractor.


To save time in the planning process, use our [online configurator](#).

- **Unsurpassed versatility:** for the installation of electrical boxes anywhere between studs at any height.
- **Galvanized Steel:** 18 gage.
- **Support Arms:** attach to the back of the Wall Bracket to support the assembly against the wall behind. No attachment hardware is required. Purchased separately.
- **Installation:** The Wall Bracket is quickly installed with screws using the holes provided in the bracket. Accepts 4" and 5" rings, and 4" and 4 11/16" x 2 1/8" boxes mounted horizontally or vertically.

SPECIFICATIONS

CATALOG NO. (EA)	OPENINGS
W1	1
W3	3
W4	4
W34	34
W16SL	16" Slider
W24SL	24" Slider

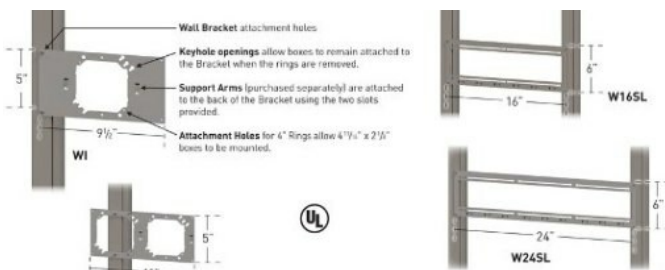

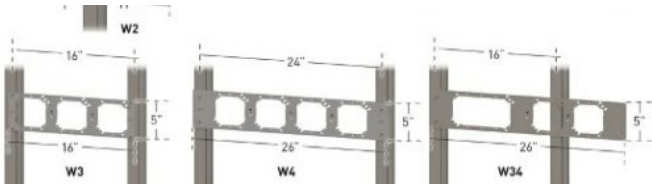

GENERAL INFO

Product Series: FAS Power